




MEDIA CREATIVE

[MDC SERIES]

MDF2S(I) MDF3S(I) MDF4S(I) MDF4S(O)

- Customized your own LED screen (size and design)
- High flexibility
- Ultra-thin & light weight
- Non-cabinet or curved cabinet
- Easy assemble
- Clear curved and vivid picture

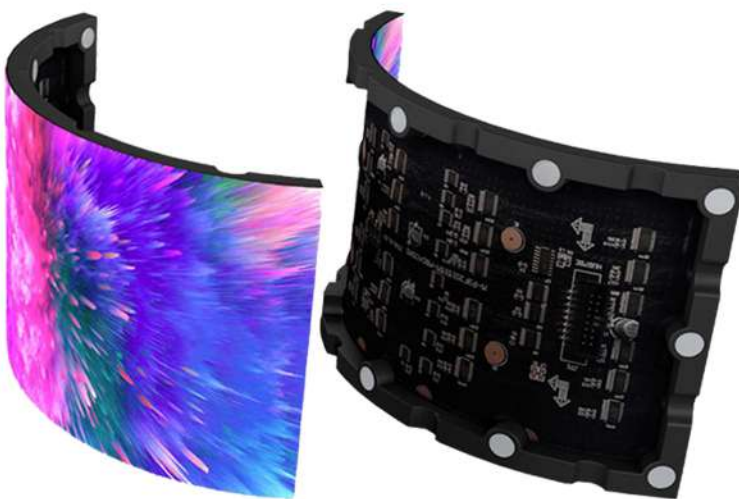

TECHNICAL PARAMETERS

| Parameter | MDC4S(I) | MDC3S(I) | MDC2S(I) | MDC4S(O) |
|--|--|----------------|----------------|----------------|
| Pixel configuration | 3-in-1 SMD2121 | 3-in-1 SMD1515 | 3-in-1 SMD1010 | 3-in-1 SMD1921 |
| Pitch(mm) | 4.00 | 3.00 | 2.50 | 4.00 |
| Module size(mm)(wxh) | 256x128 | 240x120 | 240x120 | 256x128 |
| Module resolution(wxh) | 64x32 | 80x40 | 96x48 | 64x32 |
| Pixel density (pixels/m ²) | 62500 | 111111 | 160000 | 62500 |
| Screen environment | Indoor | Indoor | Indoor | Outdoor |
| Curve angle(°) | 0-360 | | | |
| Screen thickness(mm) | 8.2 | | | |
| Cabinet weight(kg/m ²) | 10-15 | | | |
| Cabinet serviceability | Front | | | |
| Ingress protection (front/rear) | IP43/IP31 | | | |
| Brightness | 1200 | 1000 | 1000 | 4500 |
| Brightness control | 256 levels Manual/Automatic | | | |
| Contrast ratio | 4000 : 1 | | | |
| Color | 4.4 Trillion | | | |
| Grayscale | 14 bit | | | |
| Frame rate(Hz) | 50&60 | | | |
| Refresh rate(Hz) | 3840 | | | |
| Horizontal viewing angle(°) | 120 | 120 | 140 | 140 |
| Vertical viewing angle(°) | 120 | 120 | 140 | 140 |
| Max power consumption(w/m ²) | ≤ 1080 | | | |
| Average power consumption(w/m ²) | ≤ 360 | | | |
| Drive mode | Constant current drive | | | |
| Operation temperature(°C) | -10 to 50 | | | |
| Operation humidity(RH) | 10%-90% no condensation | | | |
| Input signal | DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc. | | | |
| Data interconnection | Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km) | | | |
| Lifetime(hrs) | 100000 | | | |



***All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63.65.67 Soi Rungruang . Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

